

# **CED 2500**

# **Hi Performance Dispenser**



The CED 2500 is designed using the highest quality materials and state-of-the-art technology providing our customers with consistent drink quality.

- Stainless steel cabinet, water bath, product lines, and drip tray assembly; removable refrigeration deck
- Available with 6 or 8 post-mix dispensing valves
- All valves can be serviced independently
- Insulation is CFC-free structural foam

- All installation from front of unit
- CFC-free, R134A Refrigerant
- Optional lighted front marquee kit and leg kit
- Standard capacity 3/4 hp,
  55 lb ice bank, flooded manifold
- Flex manifold configuration for multiple non-carbonated drinks




# **CED 2500 Hi Performance**

#### **OPTIONS**

Lighted Marquee



# S P E C I F I C A T I O N S

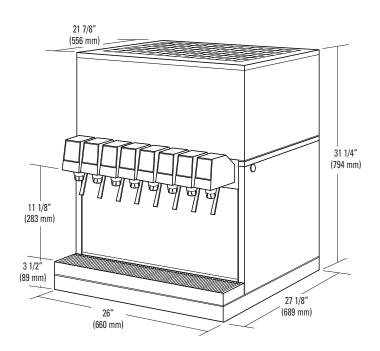

# COMPRESSOR

3/4 hp

#### **MOTORS**

Agitator: 25 w Condenser fan: 35 w

# **ICE BANK CONTROL**

Lancer Electronic Ice Bank Control

### **TRANSFORMER**

24 VAC Secondary

# WATER

Capacity: 21 gallons

#### **DIMENSIONS**

Width: 26 in (660 mm) Depth: 27.125 in (689 mm) Height: 31.125 in (794 mm)

## **ELECTRICAL**

115VAC/60Hz, 7.5AMPs 230VAC/50Hz, 7.5AMPs

#### WEIGHT

Empty: 209 lbs (95 kg) Operating: 376 lbs (171 kg) Shipping: 257 lbs (117 kg)

#### ICE

Capacity: 55 lbs (25 kg)

#### **FITTINGS**

Soda inlets: 3/8" male barb Syrup inlets: 3/8" male barb

# **VALVES**

LEV® and other valves available upon request

# FLEX MANIFOLD CONFIGURATION

6 valve 3-2-1 8 valve 3-1-1-3

**KEY LOCK SWITCH** 

# DRAW PERFORMANCE Number of Drinks Below 40°F

**75°F (24°C) Ambient Temperature** 538 drinks; 12oz. / 4 drinks per minute

## 90°F (32°C) Ambient Temperature

308 drinks; 12oz. / 2 drinks per minute 156 drinks; 12oz. / 4 drinks per minute

**Warranty:** For warranty specifics by product, contact your Lancer Sales Representatives.

CORPORATE OFFICE 6655 Lancer Blvd = San Antonio, TX 78219 210-310-7000 = 1-800-729-1500 = FAX 210-310-7250 = www.lancercorp.com