

CED 9000 Dispenser



Shrouded cabinet with optional lighted marquee

The CED 9000 is designed using the highest quality materials and state-of-the-art technology providing our customers with consistent drink quality.

- Stainless steel cabinet, water bath, product lines, and drip tray assembly; removable refrigeration deck
- Available with 5 or 6 post-mix dispensing valves
- All valves can be serviced independently
- Insulation is CFC-free structural foam
- Flex manifold configuration for multiple non-carbonated drinks

- Consistent cold carbonation for improved drink quality
- Syrup and water are accessible from the rear of cabinet
- Full wrap around merchandising
- Shrouded cabinet with illuminated graphics available
- Fully louvered top provides air circulation for more efficient operation





OPTIONS

Standard Cabinet



Shrouded Cabinet with Standard Decal




COMPRESSOR 1/3 hp

MOTORS Agitator: 25 w

Condenser fan: 9 w

ICE BANK CONTROL Lancer Electronic Ice Bank Control

S P E C I F I C A T I O N S

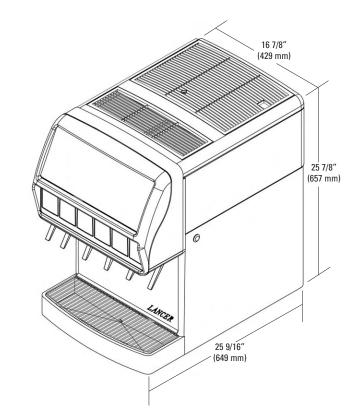

DIMENSIONS

Width: 16.875 in (429 mm) Depth: 25.563 in (649 mm) Height: 35.875 in (657 mm)

ELECTRICAL

115VAC/60Hz, 4.5AMPs 230VAC/50Hz, 4.5AMPs

WEIGHT

Empty: 146 lbs (66.2 kg) Operating: 220 lbs 99.8 kg) Shipping: 160 lbs (72.6 kg)

ICE

Capacity: 25-28 lbs (11.3-12.7 kg)

FITTINGS Soda inlets: 3/8" male barb Syrup inlets: 3/8" male barb

VALVES

LEV[®] and other valves available upon request

FLEX MANIFOLD CONFIGURATION 5 valve 2-2-1

6 valve 3-2-1

KEY LOCK SWITCH

DRAW PERFORMANCE

Number of Drinks Below 40°F

75°F (24°C) Ambient Temperature 125 drinks; 12oz. / 2 drinks per minute 97 drinks; 12oz. / 4 drinks per minute

90°F (32°C) Ambient Temperature 115 drinks; 12oz. / 2 drinks per minute

92 drinks; 12oz. / 4 drinks per minute

Warranty: For warranty specifics by product, contact your Lancer Sales Representatives. CORPORATE OFFICE 6655 Lancer Blvd - San Antonio, TX 78219