

## ICD 3023 10 Valves Drop-In Dispenser



*Note: Picture shown with optional splash guards*

The ICD 3023 is designed using the highest quality materials and state-of-the-art technology providing our customers with consistent drink quality.

- Available with 10 valves in a post-mix version
- Stainless steel construction with sealed-in cold plate
- 3/4" drain with strainer to prevent ice blockage
- Stainless steel flooded soda manifold
- Ice bin and insulated with CFC free structural foam
- Tower designed with removable splash plate for easy access to components
- Dispenser can accommodate any number of non-carbonated drinks
- Optional top merchandiser and back marquee feature lighted graphics for maximum impact and splash guards
- Soft plumbed plug-in tower offers multiple plain water configurations
- Sliding bin lid with electric interlock





# ICD 3023 10 Valves

## OPTIONS

Marquee



Merchandiser




Splash Guards



Power Supply

## SPECIFICATIONS

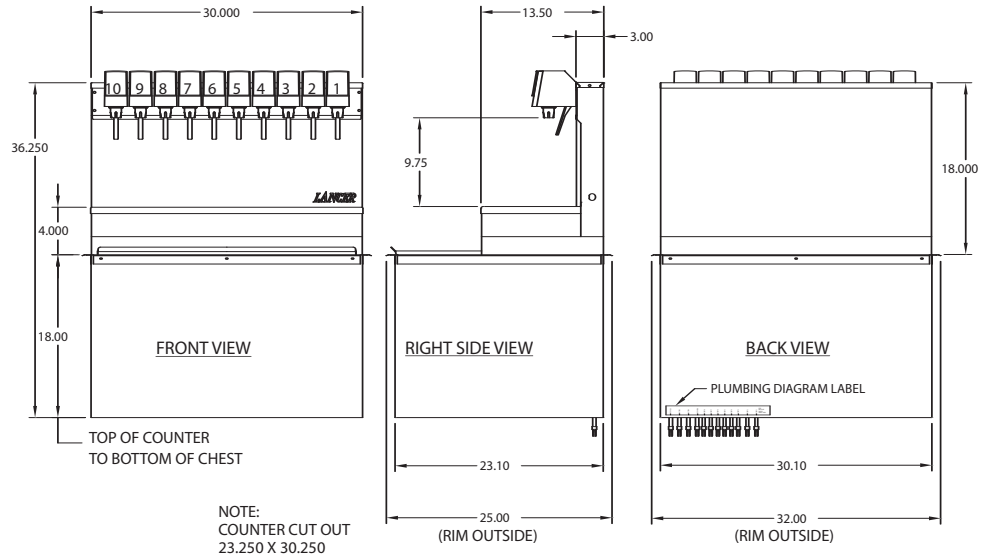

## CONVERSION STAND 30" X 23"


All stainless steel construction

Front access panel

6" (152 mm) adjustable legs

Allows quick and easy conversion from drop-in to free-standing unit

Shipping weight: 100lbs (45kg)



**Warranty:** For warranty specifics by product, contact your Lancer Sales Representatives.

Equipment design and/or specifications may change without notice.

### DIMENSIONS

Width: 30 in (762 mm)  
Depth: 23 in (584 mm)  
Height: 35.25 in (895 mm)

### SPACE REQUIRED

Width: 30.25 in (768mm)  
Deep: 23.25 in (591mm)

### ELECTRICAL

24VAC/60Hz

### WEIGHT

Operating: 370 lbs (168 kg)  
Shipping: 300 lbs (136 kg)

### ICE

Capacity: 130 lbs (59 kg)

### FITTINGS

Soda inlets: 3/8" male barb  
Syrup inlets: 3/8" male barb

### VALVES

LEV® and other valves available upon request

### FLEX MANIFOLD CONFIGURATION

10 valve 3-1-2-1-3

### DUAL KEY LOCK SWITCH

## DRAW PERFORMANCE

### Number of Drinks Below 40°F

#### 75°F (24°C) Ambient Temperature

12 oz./15 drinks per minute  
24 oz./7 drinks per minute

#### 90°F (32°C) Ambient Temperature

12 oz./8 drinks per minute  
24 oz./5 drinks per minute

*Units can supply drinks under 40°F at rated draw performance continuously as long as ice is kept on cold plate.*

CORPORATE OFFICE 6655 Lancer Blvd • San Antonio, TX 78219  
210-310-7000 • 1-800-729-1500 • FAX 210-310-7250 • www.lancercorp.com

"Lancer" is the registered trademark of Lancer © 2007 by Lancer, all rights reserved.

ICD 3023 10v Spec Sheet 07/08