

# SV-150 • SV-175 SV-200 • SV-250 Ice/Beverage Dispenser



**Servend.**



Servend's new SV Series features a no hassle one-piece structural base, recessed coldplate inlets for more line space behind the splash panel, and a modular design; all resulting in a more durable machine dispensing consistent, quality drinks.

- One-piece ABS base provides a solid foundation as well as adding structural rigidity to the dispenser.
- Enhanced agitation and drive system provides consistent ice dispense and ease of serviceability.
- Patented Rocking Chute™ simplifies ice dispensing and storage.
- Multi-port flex manifold adds carb/non-carb flexibility. Fast flavor change-overs reduce service complexity.



ISO 9001:2000  
Quality System Certified

**Leader in Ice & Beverage Dispensers**  
Countertop Ice/Bev • Drop-in • Countertop Electric  
Undercounter • Beverage Towers • Ice Chests


**Manitowoc**  
Foodservice Group

# SV-150 • SV-175 • SV-200 • SV-250 Ice/Beverage Dispenser

## Specifications

**Standard Features**  
**Approximate Shipping Weights**  
**Approximate Countertop Weight (w/o ice)**  
**Ice Storage Capacity**  
**Electrical Requirements**  
**Drain**  
**Number of Valves**  
**Ice Machine Compatibility**  
**Manifold**  
**Options**

SV-150	SV-175	SV-200	SV-250
Lighted merchandiser, Quench graphics, key switch, leg kit, and drain kit.			
250 lbs. / 113 kgs.	277 lbs. / 126 kgs.	304 lbs. / 138 kgs.	335 lbs. / 152 kgs.
198 lbs. / 90 kgs.	223 lbs. / 101 kgs.	235 lbs. / 107 kgs.	260 lbs. / 118 kgs.
Up to 150 lbs. / 68 kgs.	Up to 175 lbs. / 80 kgs.	Up to 200 lbs. / 91 kgs.	Up to 250 lbs. / 114 kgs.
Dispenser: 120V/60Hz/2.8FLA. 220V/50Hz/1 also available.			
Single 0.75" (1.91 cm) PVC (N.P.T.) drain fitting extends from drain pan. Units can be drained from the bottom or back of unit.			
6	8	8 or 10	
Manual fill or top-mount with compatible ice machines. Contact MBE for adapter kit requirements for top-mounted ice machine applications.			
6 valve 2-1-1-2	8 valve 3-1-1-2	8 valve 3-1-1-2 / 10 valve 3-1-2-1-3	
Flomatic 464 beverage valves. Both 424 and 464 available in sanitary lever, push button, portion control, and autofill valve. Other valves available. Contact MBE for details. Other options: regulators, installation kits, and side splash panels.			

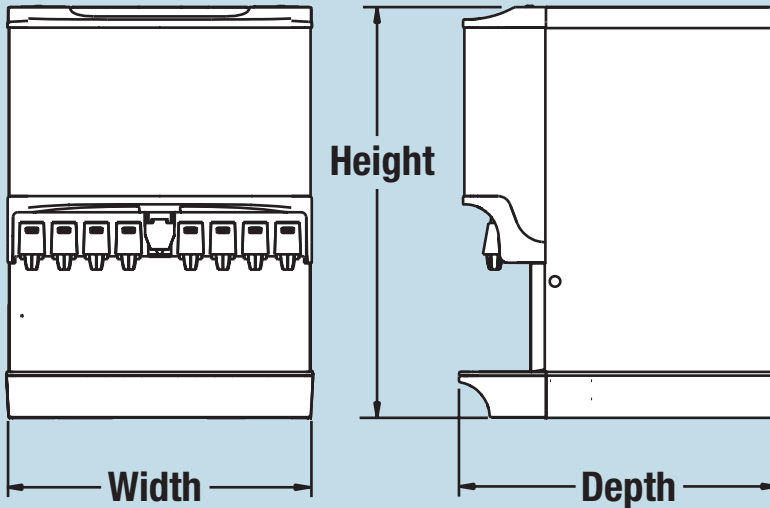

Unit	Width	Depth	Height
SV-150	23.00"	31.13"	34.88"
	58.42 cm	79.07 cm	88.60 cm
SV-175	25.00"	31.13"	34.88"
	63.50 cm	79.07 cm	88.60 cm
SV-200	30.00"	31.13"	34.88"
	76.20 cm	79.07 cm	88.60 cm
SV-250	30.00"	31.13"	40.88"
	76.20 cm	79.07 cm	103.80 cm

\*Height dimension without full lid.  
Add 0.50" (1.27 cm) for full lid.



37308 ©2007 Servend 907 Continuing product improvement may necessitate change of specifications without notice.



MANITOWOC BEVERAGE EQUIPMENT, INC.  
 2100 Future Drive  
 Sellersburg, IN 47172, USA  
 Ph: 812-246-7000 • Fax: 812-246-7024  
 Visit us online at [www.manitowocbeverage.com](http://www.manitowocbeverage.com)

